


The Integrati 8 Zone LAN Expander Module connects directly to the Integrati or RS-485 LAN and provides an additional 8 Zone Inputs, 2 Auxiliary Outputs and 2 Siren drivers.

Up to 99 Zone Expander Modules can be connected to the RS-485 LAN (or via IP using LAN over Ethernet modules - Part. 995093 see page 69 of Product Catalogue).**

The 8 Zone LAN Expander Module also offers a UniBus in-cabinet expansion interface allowing further expansion of Zone Inputs and Auxiliary Outputs using plug on UniBus expansion devices fitted within the same tamper-protected enclosure. Up to 32 Zone Inputs or 32 Auxiliary Outputs can be connected to the Module (32 Zones and 26 Auxiliaries or 24 Zones and 32 Auxiliaries at the same time).

The power supply requirement is 11 to 14VDC and a range of Integrati plug on external 2Amp, 3Amp or 8Amp switch mode power supplies are available. Integrati external power supplies are fully monitored via the 8 Zone Expander Module.

*** Where it is necessary to connect large numbers of Zone Expanders to the Integrati RS-485 LAN, the use of LAN Isolators or other LAN retransmission devices such as Fibre Modems or CLOE modules is recommended. The total amount of zone inputs available in the system is dependent on the SMART card level fitted to the Controller (See the Integrati ISC/IAC Controller data sheets for details).*

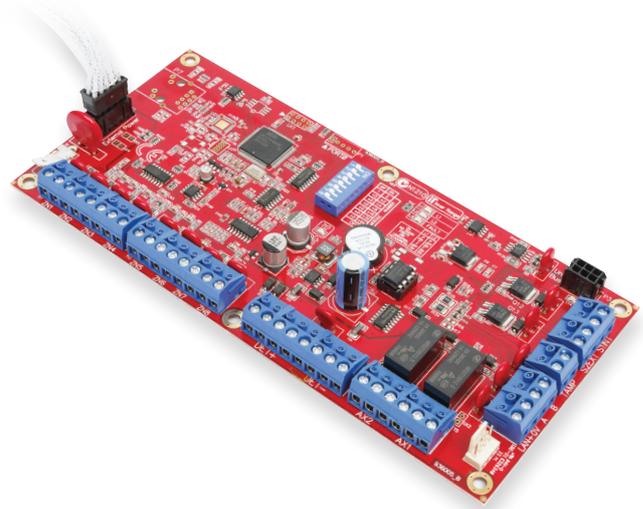

UniBus Device Compatibility Guide	UniBus Host Module			
	ISC	IAC	8 Zone Expander	ILAM
8 Zone Expander	2	0	3	0
8 Relay Expander	4	4	4	2
2 Door / 2 Reader Expander	0	3	0	3
16 Floor Lift Interface	6	6	6	6
RS-232/RS-485 UART	4	4	0	0
Analogue Expander	4	0	6	0
2nd Network Interface Card	1	1	0	0

Features


- RS-485 LAN connectivity
- UniBus In-Cabinet Expansion Interface
- 8 Zone Inputs - Multistate or Analogue
- 2 Auxiliary Output Relays
- External Integrati power supply connection
- Three options for power supply size 2Amp, 3Amp & 8Amp
- Six enclosure size options
- Dedicated Tamper Input
- Internal & External variable tone Siren Outputs
- 4 Terminals supplying 13.75VDC nominal Detector Power
- Over-The-Wire firmware upgradable
- On-board diagnostic LED's to assist with commissioning and troubleshooting
- Small PCB size 200 x 95mm
- Built-in module locator buzzer

Expansion Capabilities

- Zone Inputs - Expandable to 32 via UniBus***
- Auxiliary Outputs (Relays) - Expandable to 32 via UniBus***

***32 Zones and 26 Auxiliaries or 24 Zones and 32 Auxiliaries at the same time

Connectivity

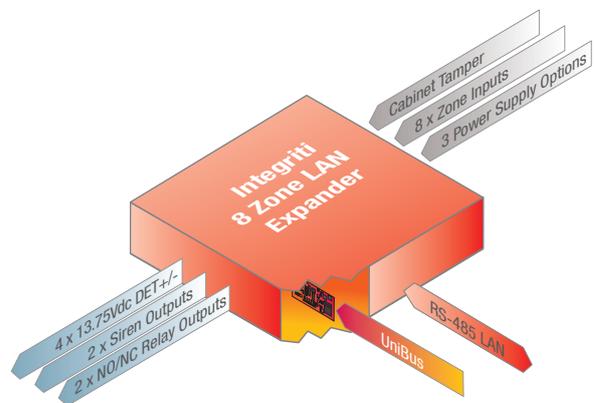

Specifications

Physical

Enclosure Options:	XSmall - 252(L) x 263(W) x 85(D) (mm): Part# 995200XS
	Small - 252(L) x 358(W) x 85(D) (mm): Part# 995200PE2 or 995200PE3
	Medium - 460(L) x 358(W) x 85(D) (mm): Part# 995201PE2, 995201PE3 or 995201PE8
	XLarge - 702(L) x 358(W) x 85(D) (mm): Part# 995203PE2, 995203PE3 or 995203PE8
	WideBody - 580(L) x 510(W) x 95(D) (mm): Part# 995204PE3 or 995204PE8
	Rack Mount - 2RU 680(L) x 420(W) x 85(D) (mm): Part# 995220PE2, 995220PE3 or 995220PE8
PCB Size Code:	Integriti "B" size
PCB Dimensions:	200(L) x 94(W) x 45(D) (mm)
Weight:	300g (For PCB & accessories Only)
Installation Environment:	0°C - 70°C @15% - 90% Relative humidity (non-condensing)

Electrical (For PCB Only)

Power Supply Input:	11V to 14VDC
Current Consumption:	60mA standby, 100mA with both Aux relays on
NOTE: Current consumption does not include the current required by detectors or other external devices such as buzzers, lamps or any device attached to the DET+, LAN+ and UniBus connections	

Contact Ratings

Aux Relays:	2 Amps @ 30VDC
-------------	----------------

Connections

Zone Inputs:	8 x Multistate Zone Inputs
Aux Outputs:	2 x Relay Output NO COM NC
Cabinet Tamper:	2 pin connection for cabinet tamper switch
UniBus Port:	1 x UniBus Host expansion port
RS-485 LAN:	1, Includes LAN+, LAN-, A, B. (LAN addressing set via DIP switches)
Siren Outputs:	1 x Internal & 1 x External variable tone Siren Outputs*
Power Supply:	1 x Integriti External Power Supply Connection
Power Outputs:	4 x 13.75Vdc nominal outputs (DET+/DET- Detector Power)

External Power Supply Monitoring (Compatible with IR SMART PSU Devices)

AC Fail:	External PS AC Fail
Low Battery:	External PS Low Battery
LAN Fuse:	External PS LAN Fuse
Detector Fuse:	External PS Detector Fuse
Low Volts:	External PS Low Volts
PSU Fail:	External PS Fail

Compliance

Electrical	
Environmental	

*Siren drivers fitted from PCB revision "B"

Ordering Options



996005PCB&K
8 Zone LAN Expander Module PCB & Kit

UniBus expansion options to suit above
See separate data sheets for UniBus devices

996500PCB&K
UniBus 8 Zone Expansion device

996515PCB&K
UniBus 8 Relay(Aux) Expansion device

996540PCB&K
UniBus 16 Floor Lift Interface device

Enclosure Options



995200PE3
small
enclosure
shown

Enclosures

- Small**
- 995200PE2/995200PEEU2 - 2Amp PSU*
 - 995200PE3/995200PEEU3 - 3Amp SMART PSU*
- Medium**
- 995201PE2/995201PEEU2 - 2Amp PSU*
 - 995201PE3/995201PEEU3 - 3Amp SMART PSU*
 - 995201PE8/995201PEEU8 - 8Amp SMART PSU**
- XLarge**
- 995203PE2/995203PEEU2 - 2Amp PSU*
 - 995203PE3/995203PEEU3 - 3Amp SMART PSU*
 - 995203PE8/995203PEEU8 - 8Amp SMART PSU**

Spare Mounting Plates for Medium, Large and WideBody Enclosures

- 999026** - Medium mounting plate to suit Integriti PCB's
- 999023** - Medium mounting plate to suit Concept PCB's
- 999006** - Large mounting plate to suit Concept or Integriti PCB's***
- 999027** - 2nd tier hinged expansion plate to suit WideBody enclosure

WideBody

- 995204PE3/995204PEEU3 - 3Amp SMART PSU*
- 995204PE8/995204PEEU8 - 8Amp SMART PSU**

Rack Mount Drawer

- 995220PE2/995220PEEU2 2RU - 2Amp PSU*
- 995220PE3/995220PEEU3 2RU - 3Amp SMART PSU*
- 995220PE8/995220PEEU8 2RU - 8Amp SMART PSU**

Please see enclosure section or website for further details on enclosures.

Part numbers containing "EU" are for the European market

* Additional external power may be required for 2 and 3Amp models.

** Product scheduled for future release in Europe

*** Suitable for 995203 series enclosures only